


| Material: | |
|------------------------|---------------------------------------|
| Contact Block: | Brass, 160-240µ" Nickel Plated |
| Contact Clip: | PhBz, Tin Plated |
| Screw: | M2, Steel, Zinc Plated, "-" slotted |
| Flange Screw: | M2.5, Steel, Zinc Plated, "-" slotted |
| Insulating Body: | Thermoplastic, UL94V-0, Blue |
| Electrical | |
| Voltage Rating: | 300 VAC |
| Current rating: | 8 AMPS |
| Withstand Voltage: | 1500 VAC, Test time 60 sec |
| Wire Range: | 16-26 AWG |
| Mechanical | |
| Torque: | 1.7 lbs-in. |
| Operating Temperature: | -40°C to +105°C -40°F to +221°F |
| Safety Approval: | UL US |

N=Number of Positions

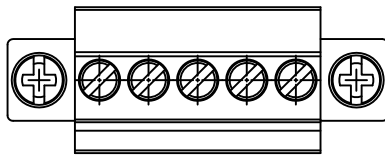

Part Number Configuration.

EB1350BM-XX-600

Number of Positions: 6
Color: Blue

(Other Color Options Available)
Please consult Factory

Max Number of Positions = 24

| | | | |
|---|--|--|--|
| UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES AND DEBURR ALL HOLES | TITLE: 3.50mm SPACING, PLUGGABLE BLOCK INSERTION KEY ON BACK SIDE, MOUNTABLE | | |
| | LIMITS: UNLESS OTHERWISE SPECIFIED HUND.±.02 FRACT.±1/64 THOU.±.005 ANGLE±1° | SCALE THIS IS A CONFIDENTIAL DRAWING AND MUSTBE TREATED AS SUCH. NO DISTRIBUTION IS ALLOWED WITHOUT WRITTEN APPROVAL BY EBY ELECTRO INC. | |